



ASWI-CAN

Steering Wheel CAN Databus Interface
for use with ASWI-X, ASWI-ALP, ASWI-PS or ASWI-ECL

Pacific Accessory Corporation

The ASWI-CAN module must be used with an optional Steering Wheel Interface module like the SWI-X, SWI-ALP, SWI-PS or SWI-ECL. The C2R-CHY interface module is recommended but is not needed. If you do not use a C2R-CHY interface, you can hard wire the SWI-CAN to any aftermarket vehicle harness (hardwire instructions are on the back).

Installation:


1. The Chrysler 22 pin harness should already be wired to the aftermarket radio harness. If not, follow the C2R-CHY instruction.
2. Connect the SWI-CAN's 6 pin male harness to the Chrysler 22 pin's 6 pin female harness or hardwire per application.
3. Plug the 11 pin connector into the optional steering wheel control interface.

Switch setting: The SWI-CAN interface has a rotary switch on the side. Please set switch according to vehicle chart.



Make	Model	Year	Switch Position	Connector Image
Chrysler, Dodge	300c	2005-2006	1	Chy-Can
	Caliber	2007	1	Chy-Can
	Charger	2005-2006	1	Chy-Can
	Durango	2004-2006	1	Chy-Can
	Magnum	2005-2006	1	Chy-Can
	Ram	2006	1	Chy-Can
Jeep	Grand Cherokee	2005-2006	2	Chy-Can

Programming: Follow the instructions for the steering wheel interface being used. Program the steering wheel interface for version # 2.

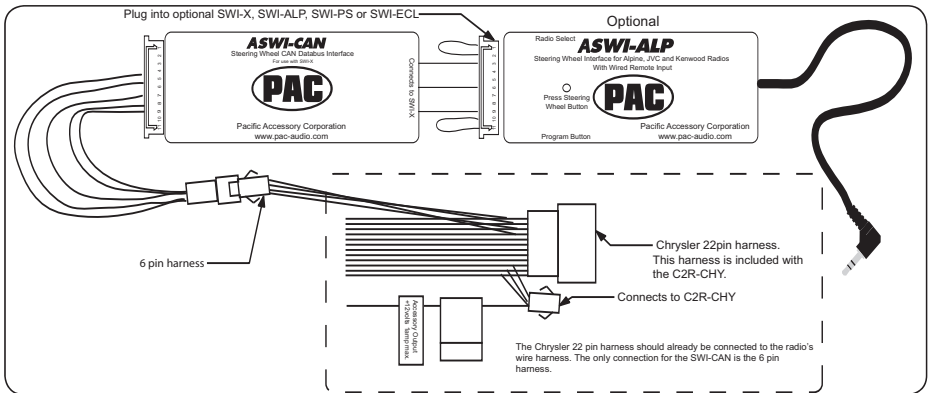

DISCLAIMER: Under no circumstances shall the manufacturer or the distributors of the SWI-CAN parts be held liable for consequential damages sustained in connection with the SWI-CAN. The manufacturer and its distributors will not, nor will they authorize any representative or any other individual to assume obligation or liability in relation to the SWI-CAN other than its replacement.



1-800-221-0932



www.metraonline.com


© Copyright 2005-07 Metra Electronics Corporation




Connecting the ASWI - CAN WITHOUT a C2R - CHY

Disclaimer:

Wire description for the ASWI-CAN harness. By using this information, you acknowledge that PAC is not liable for any issues that may occur due to improper installation. The C2R-CHY, which comes with a proper installation harness, is recommended for plug and play installation.

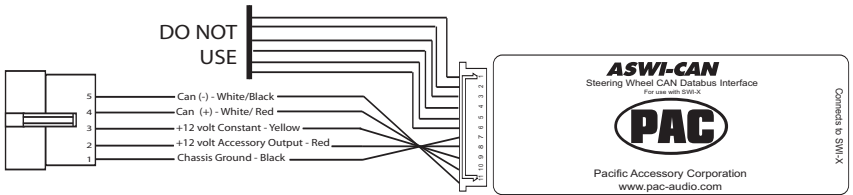

The following connector diagram is for the listed vehicle in the application guide ONLY!

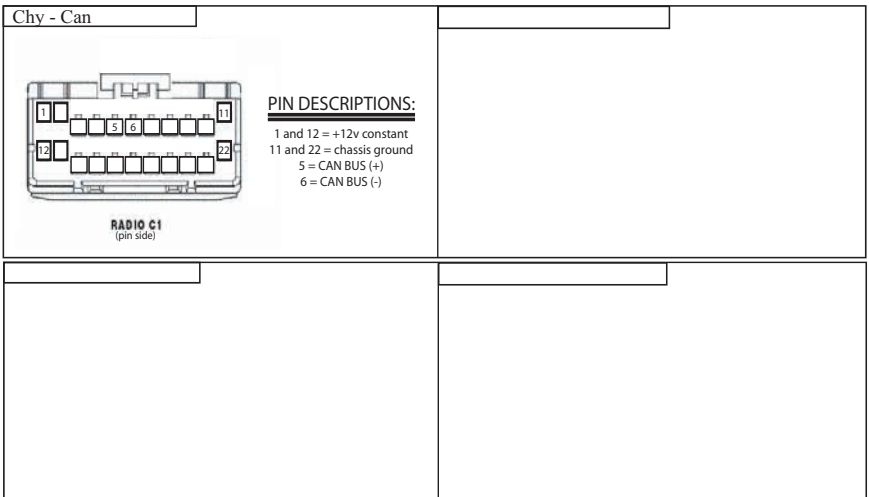

1-800-221-0932



www.metraonline.com

© Copyright 2005-07 Metra Electronics Corporation